

## Anti-pulse thick film chip resistors TPC series


TPC10 (0805) \*( ): Inch size

### Recommendation

#### ■Features

- The use of accurate resistive film printing technology and trimming has dramatically improved anti-pulse characteristics.
- Also guaranteed high rated power 0.60W
- RoHS qualified
- ELV qualified
- AEC-Q200 qualified

#### ■Structure

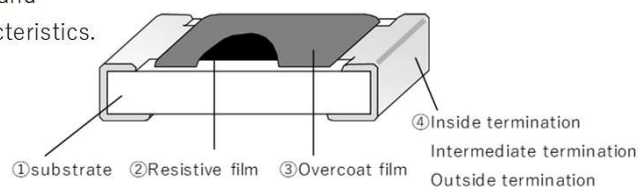

\*This is only a schematic drawing of the structure.

#### ■Part No. Explanation (Example)


| T                   | P | C | 1                    | 0 |  | T                                       | 1   | 0 | 3 | J  |
|---------------------|---|---|----------------------|---|--|---|---|---|---|--|
| Product type        |   |   | Rated power and Size |   | T.C.R  | Packaging form                          | Nominal resistance value(*)   |   |   | Resistance tolerance                           |
| TPC :<br>Anti-pulse |   |   | 10 : 0.6W,0805       |   | V: $\pm 100$<br>( $10^{-6}/^{\circ}\text{C}$ ) | T : 4mm pitch taping<br>$\phi 180$ reel | The resistance value is indicated by 3-digit numbers. E96 sequence products are indicated by a 4-digit. |   |   | J: $\pm 5\%$<br>F: $\pm 1\%$<br>D: $\pm 0.5\%$ |

\*The first two numbers are significant numbers, and the third one is the number of zeros "0" following to the first two numbers (multiple of 10).

\*In the case of the E96 sequence, the first three values mean the significant figures and the fourth one represents the number of 0 following to them (multiplier of 10).

\*If there is a decimal point in resistance value, it is indicated by "R" and all numbers are significant numbers.

#### ■Dimensions

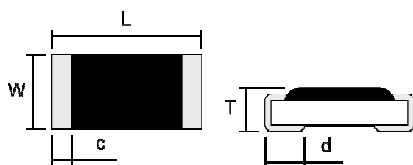

|       | L               | W               | T                      | c                      | d               |
|-------|-----------------|-----------------|------------------------|------------------------|-----------------|
| TPC10 | $2.00 \pm 0.15$ | $1.25 \pm 0.15$ | $0.55^{+0.10}_{-0.05}$ | $0.25^{+0.20}_{-0.15}$ | $0.40 \pm 0.15$ |

\* External dimensions are for reference only.

(Unit: mm)

Overcoat film color : Black

## ■ Ratings

|       | Rated power | Limiting element voltage(*1) | Maximum overload voltage(*2) | Range of rated resistance | Tolerance on rated resistance | Category temperature range | Temperature Coefficient of Resistance(T.C.R) |                           |
|-------|-------------|------------------------------|------------------------------|---------------------------|-------------------------------|----------------------------|--|---------------------------|
| TPC10 | 0.6W        | 200V                         | 400V                         | 1Ω~1MΩ                    | J (±5%)                       | -55°C~+155°C               | +25°C~+155°C                                 | ±200×10 <sup>-6</sup> /°C |
|       |             |                              |                              |                           | F (±1%)                       | -55°C~+155°C               | +25°C~+155°C                                 | ±200×10 <sup>-6</sup> /°C |
|       |             |                              |                              |                           | D (±0.5%)                     | -55°C~+155°C               | V +25°C~+155°C                               | ±100×10 <sup>-6</sup> /°C |

(\*1) Rated voltage =  $\sqrt{\text{Rated power} \times \text{Resistance value}}$

In the case of rated voltage over above limiting element voltage, limiting element voltage will be the maximum.

(\*2) The applied voltage in short time overload test = 2.5×rated voltage

In the case of the applied voltage in short time overload test over above maximum overload voltage, maximum overload voltage will be the maximum.


\* There are the supplementary information about rating on reference page.

\* Temperature Coefficient of Resistance (T.C.R) is based on JIS C5201-1 6.2 between two points: 25°C and 125°C.

## ■ Specifications and test methods

| Item                              | Specifications             | Test method  |
|-----------------------------------|----------------------------|--|
| Overload                          | ± (2%+0.05Ω)               | JIS C5201-1 8.1<br>2.5× Rated voltage, for 5 seconds |
| Bend strength of the face plating | ± (1%+0.05Ω)               | JIS C5201-1 9.8<br>Bending distance : 3mm            |
| Resistance to soldering heat      | ± (1%+0.05Ω)               | JIS C5201-1 11.2<br>260±5°C.10(sec.)                 |
| Solderability                     | Covered with more than 95% | JIS C5201-1 11.1<br>245±3°C.2(sec.)                  |
| Rapid change of temperature       | ± (1%+0.05Ω)               | JIS C5201-1 10.1<br>-55°C⇔+125°C,1000(times)         |
| Loadlife in humidity              | ± (2%+0.05Ω)               | 60±2°C. 90~95% R.H 1000h                             |
| Endurance at 70°C                 | ± (2%+0.05Ω)               | JIS C5201-1 7.1<br>70±2°C.1000h                      |

## ■ Derating curve

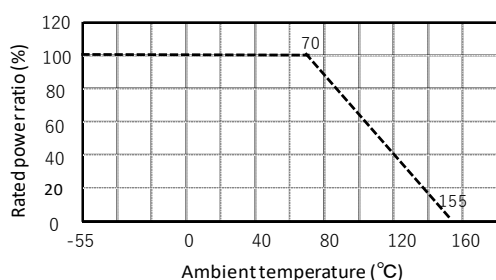

\* Rated power of the resistor is the maximum power which can be loaded continuously at the ambient temperature of 70 °C. For the ambient temperature above 70°C, please use according to the load derating curve (dotted line). Please note that the component surface temperature does not exceed operating temperature range.

\* If the component temperature is below 155°C, the power rating can be used according to the load derating curve in the solid line.