

Super anti-surge thick film chip resistors ZPS series


ZPS05 (0603) ZPS10 (0805) * () : Inch size

Recommendation

■ Features

- Guaranteed 0603 size 0.3W, 0805 size 0.5W
- ± 0.5 resistance tolerance is in lineup.
- ESD (new JASO condition) 15KV is applied, resistance change rate within 10% (actual value)
- RoHS qualified
- ELV qualified
- AEC-Q200 qualified

■ Structure

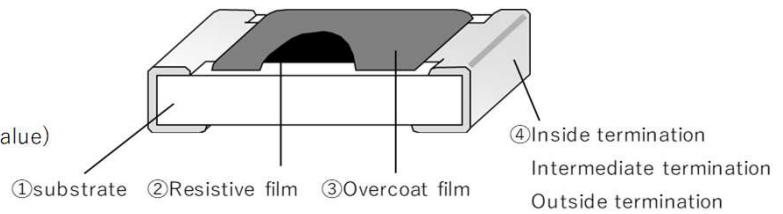

*This is only a schematic drawing of the structure.


■ Part No. Explanation (Example)

| Z | P | S | 0 | 5 | | T | 1 | 0 | 3 | J |
|---|---|---|------------------------------|---|-------------------------|---------------------------------------|--|---|---|--|
| Product type | | | Rated power and Size | | T.C.R | Packaging form | Nominal resistance value(*) | | | Resistance tolerance |
| ZPS : super Anti-surge thick film chip resistors | | | 05:0.3W,0603 10:0.5W,0805 | | Refer to "■ Ratings" | T : 4mm pitch taping φ 180 reel | The resistance value is indicated by 3-digit numbers. E96 sequence products are indicated by a 4-digit. | | | J: $\pm 5\%$ F: $\pm 1\%$ D: $\pm 0.5\%$ |

*The first two numbers are significant numbers,
and the third one is the number of zeros "0" following to the first two numbers (multiple of 10).

*In the case of the E96 sequence,
the first three values mean the significant figures and the fourth one represents the number of 0 following to them (multiplier of 10).
If there is a decimal point in resistance value, it is indicated by "R" and all numbers are significant numbers.

■ Dimensions

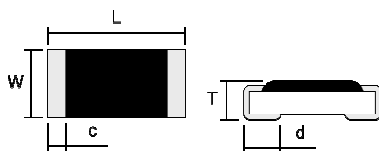

* External dimensions are for reference only.
Overcoat film color : Black

| | L | W | T | c | d |
|-------|-----------------|-----------------|------------------------|------------------------|------------------------|
| ZPS05 | 1.60 ± 0.10 | 0.80 ± 0.10 | 0.45 ± 0.10 | $0.25^{+0.15}_{-0.10}$ | $0.25^{+0.15}_{-0.10}$ |
| ZPS10 | 2.00 ± 0.15 | 1.25 ± 0.15 | $0.55^{+0.10}_{-0.05}$ | $0.25^{+0.20}_{-0.15}$ | 0.40 ± 0.15 |

(Unit: mm)

■ Ratings

| | Rated power | Limiting element voltage(*1) | Maximum overload voltage(*2) | Range of rated resistance | Tolerance on rated resistance | Category temperature range | Temperature Coefficient of Resistance(T.C.R) | | | |
|-------|-------------|------------------------------|------------------------------|---------------------------|-------------------------------|----------------------------|--|------------|--------------------------|--|
| ZPS05 | 0.3W | 150V | 200V | J品：0.1Ω~10MΩ | J(±5%) | -55℃~+155℃ | | +25℃~+125℃ | 0.1Ω~9.1Ω 10Ω~10MΩ | ±250×10 ⁻⁶ /℃ ±200×10 ⁻⁶ /℃ |
| | | | | F品：0.1Ω~1.5MΩ | F(±1%) | -55℃~+155℃ | Z | +25℃~+125℃ | 0.1Ω~0.91Ω 1Ω~9.1Ω | ±150×10 ⁻⁶ /℃ ±250×10 ⁻⁶ /℃ |
| | | | | | | +25℃~+125℃ | | 10Ω~1.5MΩ | ±200×10 ⁻⁶ /℃ | |
| | | | | D品：0.1Ω~1.5MΩ | D(±0.5%) | -55℃~+155℃ | Z | +25℃~+125℃ | 0.1Ω~0.976Ω 1Ω~1.5MΩ | ±150×10 ⁻⁶ /℃ ±100×10 ⁻⁶ /℃ |
| | | | | | | | K | | | |
| | | | | | | | | | | |
| ZPS10 | 0.5W | 200V | 400V | J品：0.1Ω~10MΩ | J(±5%) | -55℃~+155℃ | | +25℃~+125℃ | 0.1Ω~0.91Ω 10Ω~10MΩ | ±250×10 ⁻⁶ /℃ ±200×10 ⁻⁶ /℃ |
| | | | | F品：0.1Ω~1.5MΩ | F(±1%) | -55℃~+155℃ | | +25℃~+125℃ | 0.1Ω~0.91Ω 1Ω~1.5MΩ | ±250×10 ⁻⁶ /℃ ±200×10 ⁻⁶ /℃ |
| | | | | | | | | | | |
| | | | | D品：0.1Ω~1.5MΩ | D(±0.5%) | -55℃~+155℃ | | +25℃~+155℃ | 0.1Ω~0.976Ω 1Ω~1.5MΩ | ±100×10 ⁻⁶ /℃ ±100×10 ⁻⁶ /℃ |
| | | | | | | | K | +25℃~+125℃ | | |
| | | | | | | | | | | |

(*1) Rated voltage = $\sqrt{\text{Rated power} \times \text{Resistance value}}$

In the case of rated voltage over above limiting element voltage, limiting element voltage will be the maximum.

(*2) The applied voltage in short time overload test = 2.5×rated voltage

In the case of the applied voltage in short time overload test over above maximum overload voltage, maximum overload voltage will be the maximum.


* There are the supplementary information about rating on reference page.

* Temperature Coefficient of Resistance (T.C.R) is based on JIS C5201-1 6.2 between two points: 25°C and 125°C.

■ Specifications and test methods

| Item | Specifications | Test method |
|-----------------------------------|----------------------------|---|
| Overload | ±(2%+0.05Ω) | JIS C5201-1 8.1 2.5×Rated voltage, for 5 seconds |
| Bend strength of the face plating | ±(1%+0.05Ω) | JIS C5201-1 9.8 Bending distance : 3mm |
| Resistance to soldering heat | ±(1%+0.05Ω) | JIS C5201-1 11.2 260±5°C.10(sec.) |
| Solderability | Covered with more than 95% | JIS C5201-1 11.1 245±3°C.(sec.) |
| Rapid change of temperature | ±(1%+0.05Ω) | JIS C5201-1 10.1 -55°C⇄+125°C,1000(times) |
| Loadlife in humidity | ±(2%+0.05Ω) | 60±2°C.90~95% R.H 1000h |
| Endurance at 70°C | ±(2%+0.05Ω) | JIS C5201-1 7.1 70±2°C.1000h |

■ Derating curve

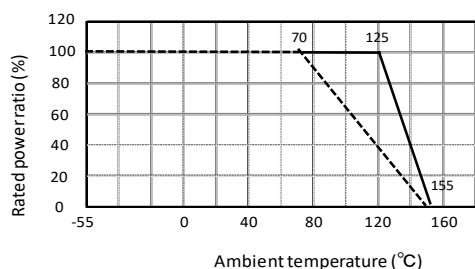

* Rated power of the resistor is the maximum power

which can be loaded continuously at the ambient temperature of 70 °C.

For the ambient temperature above 70°C,

please use the item according to the load derating curve (dotted line)

Please note that the component surface temperature

does not exceed operating temperature range.

* If the component temperature is below 155°C,

the power rating can be used according to the load derating curve in the solid line.