

# High reliability type thick film chip resistors ZPR series

Ver.2

ZPR03 (0402) ZPR05 (0603) ZPR10 (0805)


\*( ) : Inch size

**Recommendation**

## ■ Features

- Load life in Humidity is much better than conventional chip resistors.
- Long time stability  $\pm 0.2\%$
- Tolerance on rated resistance  $\pm 0.1\%$
- TCR  $\pm 50\text{ppm}/^\circ\text{C}$   
( $\pm 25\text{ppm}/^\circ\text{C}$  is available depending on resistance value)
- RoHS qualified
- ELV qualified
- AEC-Q200 qualified

## ■ Structure

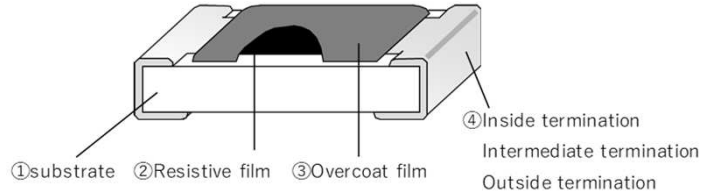

\*This is only a schematic drawing of the structure.

## ■ Part No. Explanation (Example)


Z	P	R	0	5	Y	T	1	0	3	B
Product type			Rated power and Size		T.C.R	Packaging form	Nominal resistance value(*)			Resistance tolerance
ZPR : High reliability			03 : 0.063W,0402 05 : 0.2W,0603 10 : 0.25W,0805		Refer to " ■ Ratings"	T : 4mm pitch taping $\phi$ 180 reel (ZPR 03 is 2mm pitch)	The resistance value is indicated by 3-digit numbers. E96 sequence products are indicated by a 4-digit.			B: $\pm 0.1\%$

\*The first two numbers are significant numbers, and the third one is the number of zeros "0" following to the first two numbers (multiple of 10).

\*In the case of the E96 sequence, the first three values mean the significant figures and the fourth one represents the number of 0 following to them (multiplier of 10)

\*If there is a decimal point in resistance value, it is indicated by "R" and all numbers are significant numbers.

## ■ Dimensions

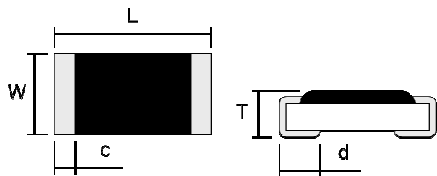

\* External dimensions are for reference only.  
Overcoat film color : Black

	L	W	T	c	d
ZPR03	1.00 $\pm$ 0.05	0.50 <sup>+0.10</sup> / <sub>-0.05</sub>	0.35 $\pm$ 0.05	0.20 $\pm$ 0.10	0.25 <sup>+0.05</sup> / <sub>-0.10</sub>
ZPR05	1.60 $\pm$ 0.10	0.80 $\pm$ 0.10	0.45 $\pm$ 0.10	0.25 <sup>+0.15</sup> / <sub>-0.10</sub>	0.25 <sup>+0.15</sup> / <sub>-0.10</sub>
ZPR10	2.00 $\pm$ 0.15	1.25 $\pm$ 0.15	0.55 <sup>+0.10</sup> / <sub>-0.05</sub>	0.25 <sup>+0.20</sup> / <sub>-0.10</sub>	0.40 $\pm$ 0.15

(Unit: mm)

## ■ Ratings

	Rated power	Limiting element voltage(*1)	Maximum overload voltage(*2)	Range of rated resistance	Tolerance on rated resistance	Category temperature range	Temperature Coefficient of Resistance(T.C.R)			
ZPR03	0.063W	75V	150V	100Ω~68KΩ	B	-55°C~+155°C	Y	+25°C~+155°C	100Ω~68KΩ	± 50 × 10 <sup>-6</sup> /°C
								-55°C~+25°C	100Ω~294Ω	-100~+50 × 10 <sup>-6</sup> /°C
									300Ω~3.9KΩ	± 50 × 10 <sup>-6</sup> /°C
									3.92KΩ~68KΩ	-100~+50 × 10 <sup>-6</sup> /°C
ZPR05	0.2W	150V	150V	36Ω~300KΩ	B	-55°C~+155°C	Y	+25°C~+155°C	36Ω~300KΩ	± 50 × 10 <sup>-6</sup> /°C
								-55°C~+25°C	36Ω~732Ω	-100~+50 × 10 <sup>-6</sup> /°C
									750Ω~18KΩ	± 50 × 10 <sup>-6</sup> /°C
									18.2KΩ~300KΩ	-100~+50 × 10 <sup>-6</sup> /°C
								E	+25°C~+125°C	2.4KΩ~300KΩ
ZPR10	0.25W	150V	200V	100Ω~2MΩ	B	-55°C~+155°C	Y		+25°C~+155°C	100Ω~2MΩ
								-55°C~+25°C	100Ω~2MΩ	-80~+70 × 10 <sup>-6</sup> /°C
									E	+25°C~+125°C

(\*1) Rated voltage =  $\sqrt{\text{Rated power} \times \text{Resistance value}}$

In the case of rated voltage over above limiting element voltage, limiting element voltage will be the maximum.

(\*2) The applied voltage in short time overload test = 2.5 × rated voltage

In the case of the applied voltage in short time overload test over above maximum overload voltage, maximum overload voltage will be the maximum.


\* There are the supplementary information about rating on reference page.

\* Temperature Coefficient of Resistance (T.C.R) is based on JIS C5201-1 6.2 between two points: -55°C and 25°C, 25°C and 155°C.  
However ± 25ppm is between two points: 25°C and 125°C

## ■ Specifications and test methods

Item	Specifications	Test method
Overload	± (0.2%+0.05Ω)	JIS C5201-1 8.1 2.5 × Rated voltage, for 5 seconds
Bend strength of the face plating	± (0.2%+0.05Ω)	JIS C5201-1 9.8 Bending distance : 3mm
Resistance to soldering heat	± (0.2%+0.05Ω)	JIS C5201-1 11.2 260 ± 5°C.10(sec.)
Solderability	Covered with more than 95%	JIS C5201-1 11.1 245 ± 3°C.2(sec.)
Rapid change of temperature	± (0.2%+0.05Ω)	JIS C5201-1 10.1 -55°C ⇄ +125°C, 1000(times)
Loadlife in humidity	± (0.2%+0.05Ω)	60 ± 2°C. 90~95% R.H 1000h
Endurance at 70°C	± (0.2%+0.05Ω)	JIS C5201-1 7.1 70 ± 2°C.1000h

## ■ Derating curve

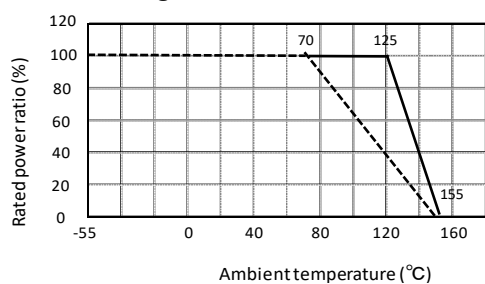

\* Rated power of the resistor is the maximum power which can be loaded continuously at the ambient temperature of 70 °C. For the ambient temperature above 70°C, please use according to the load derating curve (dotted line). Please note that the component surface temperature does not exceed operating temperature range.

\* If the component temperature is below 155°C, the power rating can be used according to the load derating curve in the solid line.